

DKG-184 BATTERY VOLTAGE MONITOR UNIT

FEATURES

Precision voltage monitoring
Isolated Output stage
24V version available
Adjustable detection threshold
Charge-discharge indications
DIN rail mounted
Compact size
Plug-in connection system for easy replacement

DESCRIPTION

The Datakom Battery Monitor is a compact unit used in telecom systems. It monitors the telecom battery discharge level in order to trigger external battery charging systems like diesel generating sets.

The unit is designed to be mounted on a DIN Rail, inside a panel. Its size is equivalent to two standard circuit breakers.

Thanks to the optical isolation between input and output the unit can be used with different systems including genset control systems.

The unit has an adjustable precision threshold level for low-battery detection. The adjustment is made from the front panel with a screwdriver. Charge and discharge leds indicate the current battery status.

The CHARGE led turns on when the battery voltage is above 52.0 V-DC. The DISCHARGE led turns on when the battery voltage is below 52.0 V-DC.

The BATTERY LOW led turns on when the battery voltage falls below 46V-DC (adjustable).

The unit is powered up from the battery which is monitored. The output is an optically isolated semiconductor, conducting when the BATTERY LOW led turns on.


Connections are made with 2 part plug and socket connector.



TECHNICAL SPECIFICATIONS

DC Battery Range: nominal 48 Vdc
Operating Current: 33 mA-DC max.
Output configuration: isolated open collector transistor.
Output Current: 10 mA max.
Output voltage: 60 V-DC max.
Operating temp.: -20°C (-4°F) to 70 °C (158°F).
Storage temp.: -40°C (-40°F) to 80 °C (176°F).
Maximum humidity: 95% non-condensing.
Dimensions: 36 x 104 x 58 mm (WxHxD)
Weight: 65 g (approx.)
Conformity (EU directives)
 -2006/95/EC (low voltage)
 -2004/108/EC (electro-magnetic compatibility)

CONNECTION DIAGRAM

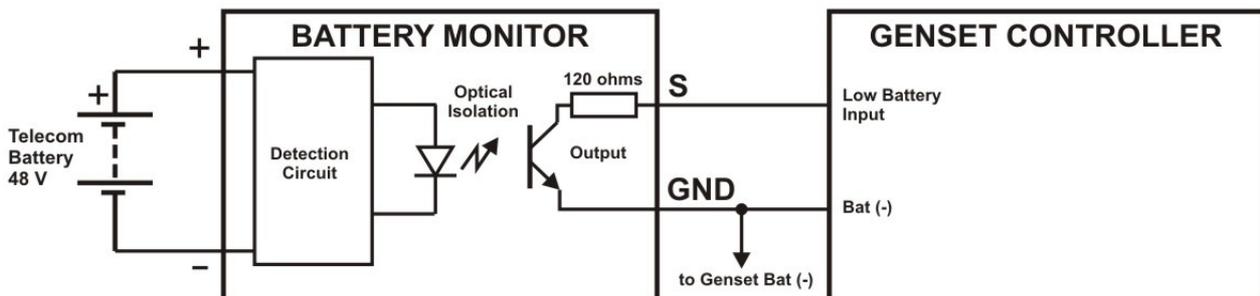

DATAKOM Electronics Ltd.

Tel : +90-216-466 84 60

Fax : +90-216-364 65 65

http: www.datakom.com.tr

e-mail : datakom@datakom.com.tr